

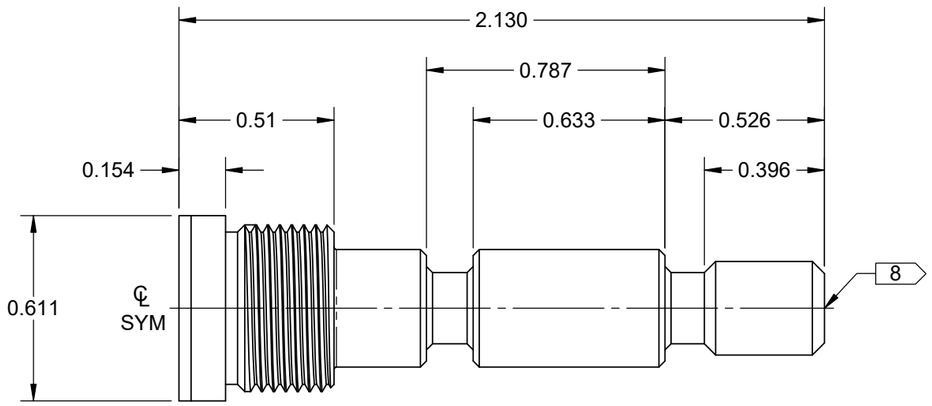

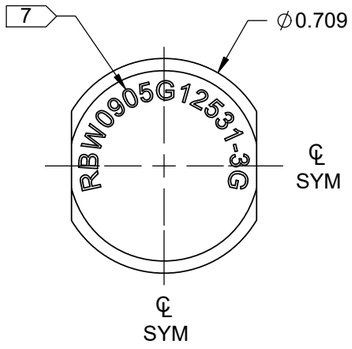

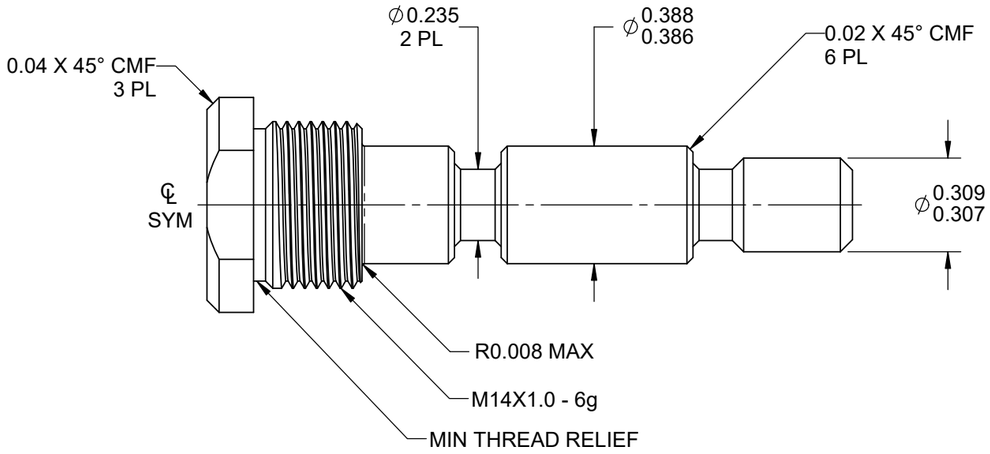

RBW0905G12351-3G PIVOT SHEAR BOLT

NOTES:
1) MATERIAL: 6061-T6
2) HEAT TREAT: N/A
3) FINISH: ANODIZE RED PER MIL-A-8625 TYPE 2 CLASS 2
4) TOLERANCES: X.X = +/- 0.1" / +/- 1˚
X.XX = +/- 0.01" / +/- 0.5˚
X.XXX = +/- 0.005" / +/- 0.1˚
X.XXXX = +/- 0.0005" / +/- 0.05˚
PARALLELISM, ECCENTRICITY AND SYMMETRY ABOUT ALL CENTER LINES = +/-0.005"
5) UNITS: INCHES UNLESS OTHERWISE NOTED
6) REMOVE ALL SHARP EDGES AND BURRS
7) IDENTIFICATION: MACHINE ENGRAVE OR DOT MARK T/N, "RBW0905G12351-3G", AS SHOWN
8) CENTER DRILL IS ACCEPTABLE

REV.	DESCRIPTION	ECN #	BY
D	DIM WAS ⌀0.391+0.000/-0.002 IS ⌀0.386-0.388. DIM WAS ⌀0.312 +0.000/-0.002 IS ⌀0.307-0.309		KPT

DESIGN	KPT	**DART AEROSPACE LTD** HAWKESBURY, ONTARIO, CANADA
DRAWN	KPT	
CHECKED	RF	TOOL PART # RBW0905G12351-3G REV. D SHEET 1 OF 1
MFG. APPR.	RQ	
APPROVED	SAD	TITLE PIVOT SHEAR BOLT SCALE NTS
DATE	2/24/2021	

COPYRIGHT © 2019 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.